

SELECTION GUIDE



**HOME DRINKING
WATER SOLUTIONS**

1

POINT-OF-USE CARTRIDGES & HOUSINGS

Housings

<u>Item No.</u>	<u>Model</u>	<u>Description</u>
150067	#10	#10 Blue Standard 3/4" c/w Pressure Relief
150164	#10	#10 Blue Valve in Head 3/4" c/w Pressure Relief

Cartridges

<u>Item No.</u>	<u>Model</u>	<u>Description</u>	<u>Micron Rating</u>
15507143	WP-5	Extra-Fine Sediment Removal	5
15500143	S1	Sediment Removal	20
15507243	WP-30	Superior Sediment Removal	30
15510943	GAC-10	Superior Taste & Odor Removal	N/A
15526843	CBR2-10	Taste, Odor, Lead & Cyst Removal	0.5
15500243	C1	Taste, Odor & Sediment Removal	5



Full line of cartridges and housings available for other applications.

Consult product literature for flow rate and pressure drop specifications.

Hydrotech 
Your clear choice in water treatment.

2

POINT-OF-ENTRY CARTRIDGES & HOUSINGS


Housings

<u>Item No.</u>	<u>Model</u>	<u>Description</u>
150237	#10	Big Blue® 10" Housing, 1", c/w Pressure Relief
150233	#20	Big Blue® 20" Housing, 1", c/w Pressure Relief

Cartridges

<u>Item No.</u>	<u>Model</u>	<u>Description</u>	<u>Micron Rating</u>
15518443	CP5-BB	10" Pleated Sediment Removal	5
15542843	CP5-20BB	20" Pleated Sediment Removal	5
15540543	S1-BB	10" Pleated Sediment Removal	20
15530543	S1-20BB	20" Pleated Sediment Removal	20
15510143	R30-BB*	10" Pleated Sediment Removal	30
15543043	R30-20BB*	20" Pleated Sediment Removal	30
15505343	R50-BB*	10" Pleated Sediment Removal	50
15514143	RFC-BB	10" Superior Taste & Odor Removal	25
15524743	RFC20-BB	20" Superior Taste & Odor Removal	25
15517043	CBC-BB	10" Taste, Odor, Lead & Cyst Removal	0.5
15531243	CBC20-BB	20" Taste, Odor, Lead & Cyst Removal	0.5

**Reusable*

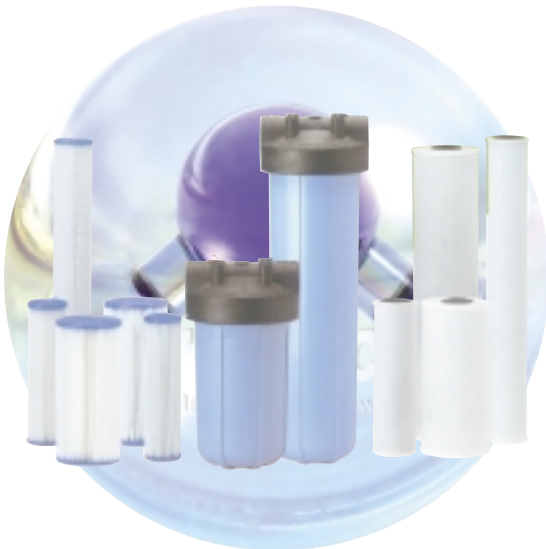

Full line of cartridges and housings available for other applications.

Consult product literature for flow rate and pressure drop specifications.

Hydrotech 
Your clear choice in water treatment.

3

REVERSE OSMOSIS

Recommended Models

<u>Item No.</u> ⁽¹⁾	<u>Model</u>	<u>Output GPD</u> ⁽²⁾	<u>TDS Monitor</u>
12302002	4VTFC50G	50	None
12302003	4VTFC75G	75	None
12303001	4VTFC25G-PB	25	Push Button
12303002	4VTFC50G-PB	50	Push Button
12303003	4VTFC75G-PB	75	Push Button
12304002	4VTFC50G-FM	50	Faucet
12304003	4VTFC75G-FM	75	Faucet

(1) Add "- 00" to end of item number for Canada (e.g. 12302002-00) or "- 01" to end of item number for U.S. (e.g. 12302002-01)

(2) Manufacturers' output specifications only with inlet conditions of 345 kPa (50 psig), 25°C (77°F), going to atmosphere.

Conditions for Use

Source Water Supply		Source Water Parameters	
Community/Private	Chlorinated/Non-Chlorinated	Hardness (CaCO ₃)	<20 gpg
Feed Water Pressure	242-690 kPa (35-100 psig)	Iron (Fe)	<0.1 ppm
Temperature	4°-38°C (40°-100°F)	Manganese (Mn)	<0.05 ppm
pH Range	3.0 - 11.0	Hydrogen Sulfide (H ₂ S)	0 ppm
Maximum TDS Level	2000 ppm	Residual Chlorine (Cl ₂)	<2.0 ppm
Turbidity*	<1.0 NTU *Nephelometric Turbidity Unit		
Maximum SDI**	<4.0 **Silt Density Index: Value stated in SDI Units		



A complete line is available for other applications including NSF standard 58 certified models.

Hydrotech 
Your clear choice in water treatment.

4

AQUAFIER ADVANCED MULTI-STAGE WATER TREATMENT SYSTEM

Recommended Models

<u>Item No.</u>	<u>Model</u>	<u>Service Flow</u> <u>GPM</u>	<u>Capacity</u> <u>Gallons</u>	<u>Gallons</u> <u>Monitor</u>
10401000	AQ 4V	0.5	1050	None
10403001	AQ 4V PB	0.5	1750	Push Button
10403002	AQ 4V FM	0.5	1750	Faucet

Conditions for Use

Source Water Supply Profile	
Community / Private	Chlorinated / Non-Chlorinated
System Pressure	173 - 690 kPa (25 - 100 psig)
Temperature	4°C - 38°C (40°F - 100°F)

Application Guidelines

Use this system on potable water supplies only. Do not use this system where water is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the system.



A complete line is available for other applications including NSF standard 42 & 53 certified models.

Hydrotech
Your clear choice in water treatment.

5

ULTRAVIOLET DISINFECTION

Features	UVB Series	UV20 Series	DLR A Series	DLR M Series
Effective microbiological protection	●	●	●	●
NSF Standard Class A				●
Stainless steel disinfection chamber	●	●	●	●
High-intensity UV lamps	●	●	●	●
High performance electronics	●	●	●	●
Lamp operation indicator	●	●	●	●
Micro-computer controller				●
Audible alarm	●*	●*	●	●
Visual alarm	●*	●*	●	●
Push button alarm/computer reset				●
Optional automatic safety shut-off valve	●	●		●
Pre filtration	●	●		
EPCB cyst rated carbon filter	●	●		
UV intensity monitor and LED readout				●
UL listed	●	●	●	●

*Optional

Recommended Models



Item No.	Model	Flow Rates (GPM) at UV Dosage ⁽¹⁾			Inlet/Outlet Size Inches
		≥40 ml/cm ²	≥30 ml/cm ²	≥16 ml/cm ²	
15013001	UVB1-EPCB	.5	1.1	2	1/2"
15016201	UV20-2 w/CB	4	6	10	3/4"
8700	A1	4	5	10	1/2"
8701	A2	10	13	25	3/4"
8708 ⁽²⁾	M1 NSF	4	5	10	1/2"
8709 ⁽²⁾	M2 NSF	10	13	25	3/4"

⁽¹⁾ Recommend systems be sized for the flow rate given at a minimum UV dose of 30 ml/cm²

⁽²⁾ Models M1 & M2 are NSF Standard 55, Class A certified and include a flow control to maintain a 40 ml/cm² dose.

Water must be clear for the UV disinfection system to function properly. Pre-treatment may be required. Other models available for larger flow requirements.

Hydrotech 
Your clear choice in water treatment.

